

## Temptainer Basic Single

Temptainer Basic is the new generation of high quality stainless steel trolleys from Hallins. However, the purpose is still the same – to create the very best conditions for preserving the values of good food, all the way from kitchen to table.



temptainer®

Temptainer Basic Single is Hallins popular single trolley. A smart and well-insulated construction in combination with the proper technology ensures that the food quickly gets and maintains the required temperature until serving.

The trolley is made entirely of stainless steel for the best possible hygiene, durability and longevity. It has the same good features, performance and functionality as the previous generation.




Temptainer Basic Single has a fully welded inner cabinet with pressed guides for maximum hygiene and durability. The trolley is available in four different variants: neutral, convection heating, compressor cooling and Peltier cooling.

The heating and cooling units are located in the back of the trolley which provides optimal air circulation and temperature as well as simple service and maintenance. The trolley is equipped with large ball-bearing castors for easy maneuvering.

ACCESSORIES: Vertical steering handle, central brake, 200 mm castors, tow bar.



ARTIKEL	M6060012-01	M6062012-01	M6063012-01	M6064012-01
Model	Neutral	Convection heating	Peltier cooling	Convection compressor cooling
Number of guides for GN Containers	12 pairs	12 pairs	12 pairs	12 pairs
Distance between guides	80 mm	80 mm	80 mm	80 mm
Capacity GN Containers	12 x 1/1-65 or 6 x 1/1-150	12 x 1/1-65 or 6 x 1/1-150	12 x 1/1-65 or 6 x 1/1-150	12 x 1/1-65 or 6 x 1/1-150
Capacity	max 120 liter	max 120 liter	max 120 liter	max 120 liter
Weight	50 kg	56 kg	80 kg	85 kg
Electrical connection	-	220-240 V AC / 50-60 Hz / 800 W	220-240 V AC / 50-60 Hz / 135 W	220-240 V AC / 50-60 Hz / 136 W
Heat up time	-	15 minutes	-	-
Cool-down time to +3 °C (at +25°C)	-	-	40 minutes	15 minutes
Thermostat	-	Digital adjustable	Digital adjustable	Digital adjustable
Insulation	min 40 mm CFC-free polyurethane	min 40 mm CFC-free polyurethane	min 40 mm CFC-free polyurethane	min 40 mm CFC-free polyurethane
Castors	160 mm, 2 fixed, 2 steering w brakes	160 mm, 2 fixed, 2 steering w brakes	160 mm, 2 fixed, 2 steering w brakes	160 mm, 2 fixed, 2 steering w brakes
Temperature indicator	-	Digital	Digital	Digital
Enclosure class IP	IP 55 inside, IP 55 outside	IP 55 inside, IP 21 outside	IP 55 inside, IP 21 outside	IP 55 inside, IP 21 outside
Material	EN 1.4301, polyurethane	EN 1.4301, polyurethane	EN 1.4301, polyurethane	EN 1.4301, polyurethane
Dimensions	A = 770 mm	A = 770 mm	A = 880 mm	A = 880 mm

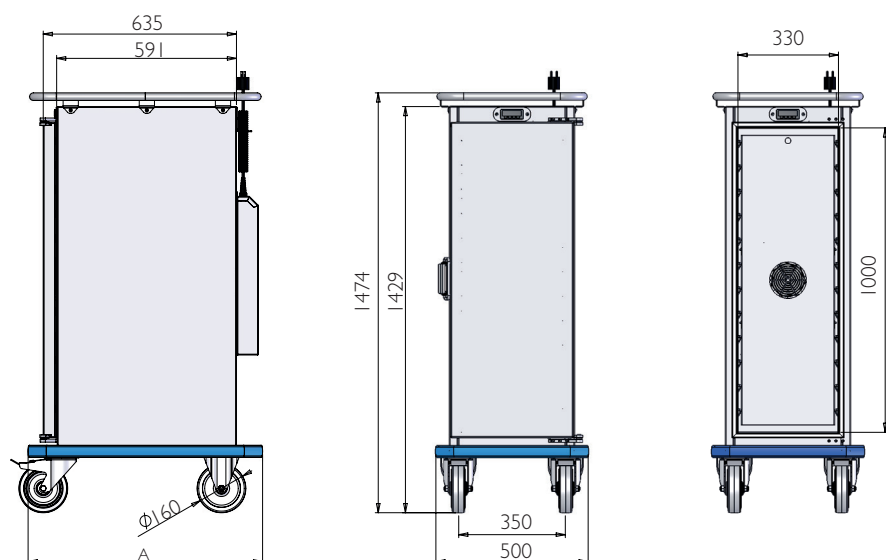

Uniform temperature



Hygienic



Stainless



Climate-smart