



Temptainer Basic Twin

Temptainer Basic is the new generation of high-quality stainless steel boxes from Hallins. The aim is the same as before - to create the absolute best conditions to preserve the essence of good food, all the way from kitchen to table.



temptainer[®]
BY HALLINS

Temptainer Basic Twin is a trolley with double compartments, side by side, for transporting large volumes of both hot and cold food at the same time. A smart and well-insulated construction in combination with the proper technology ensures that the food quickly gets and maintains the required temperature until serving.

The trolley is made entirely of stainless steel for the best possible hygiene, durability and longevity. It has the same good features, performance and functionality as the previous generation.




Temptainer Basic Twin is available in several different combinations of convection heating, neutral or compressor cooling. The heating and cooling units are located in the back of the trolley that provides optimal air circulation and temperature as well as simple service and maintenance. The trolley is equipped with large ball-bearing castors for easy maneuvering.

Accessories: 200 mm castors, tow bar, foil.



	NEUTRAL + NEUTRAL	HEATING + NEUTRAL	HEATING + HEATING	HEATING+ COMPRESSOR COOLING	COMPRESSOR COOLING + COMPRESSOR COOLING
Product code	M60001212DDA M60001414DDA	M60001212DAA M60001414DAA	M60001212AAA M60001414AAA	M60001212ABA M60001414ABA	M60001212BBA M60001414BBA
Number of guides	12+12 / 14+14	12+12 / 14+14	12+12 / 14+14	12+12 / 14+14	12+12 / 14+14
Capacity GN containers	12+12 x 1/1-65 or 6+6 x 1/1-150 14+14 x 1/1-65 or 7+7 x 1/1-150	12+12 x 1/1-65 or 6+6 x 1/1-150 14+14 x 1/1-65 or 7+7 x 1/1-150	12+12 x 1/1-65 or 6+6 x 1/1-150 14+14 x 1/1-65 or 7+7 x 1/1-150	12+12 x 1/1-65 or 6+6 x 1/1-150 14+14 x 1/1-65 or 7+7 x 1/1-150	12+12 x 1/1-65 or 6+6 x 1/1-150 14+14 x 1/1-65 or 7+7 x 1/1-150
Distance between guides, mm	80	80	80	80	80
Capacity, max liter	120+120 / 140+140	120+120 / 140+140	120+120 / 140+140	120+120 / 140+140	120+120 / 140+140
Weight, kg	119 / 129	127 / 137	135 / 145	148 / 158	161 / 171
Electrical connection	220-240V AC/ 50-60 Hz	220-240V AC/ 50-60 Hz / 1100 W	220-240V AC/ 50-60 Hz / 2200 W	220-240V AC/ 50-60 Hz / 1380 W	220-240V AC/ 50-60 Hz / 560 W
Left cabinet	Neutral	Convection heating	Convection heating	Convection heating	Compressor cooling
Heat up time	-	15 minutes	15 minutes	15 minutes	-
Cooling down time to +3°C (at +25°C)	-	-	-	-	15 minuter
Right cabinet	Neutral	Neutral	Convection heating	Compressor cooling	Compressor cooling
Heat up time	-	-	15 minutes	-	-
Cooling down time to +3°C (at +25°C)	-	-	-	15 minutes	15 minutes
Thermostat	-	Digital adjustable(heat)	Digital adjustable	Digital adjustable	Digital adjustable
Insulation	min 40 mm CFC-free polyurethan	min 40 mm CFC-free polyurethan	min 40 mm CFC-free polyurethan	min 40 mm CFC-free polyurethan	min 40 mm CFC-free polyurethan
Castors	160 mm, 2 fixed, 2 steering w brakes	160 mm, 2 fixed, 2 steering w brakes	160 mm, 2 fixed, 2 steering w brakes	160 mm, 2 fixed, 2 steering w brakes	160 mm, 2 fixed, 2 steering w brakes
Temperature indicator	-	Digital (heat)	Digital	Digital	Digital
Safety class	IP 55 inside, IP 55 outside	IP 55 inside, IP 21 outside	IP 55 inside, IP 21 outside	IP 55 inside, IP 21 outside	IP 55 inside, IP 21 outside
Material	EN 1.4301, polyurethan	EN 1.4301, polyurethan	EN 1.4301, polyurethan	EN 1.4301, polyurethan	EN 1.4301, polyurethan
Depth (A), mm	770 / 770	770 / 770	770 / 770	870 / 870	870 / 870
Height (B), mm	1375 / 1535	1375 / 1535	1375 / 1535	1375 / 1535	1375 / 1535

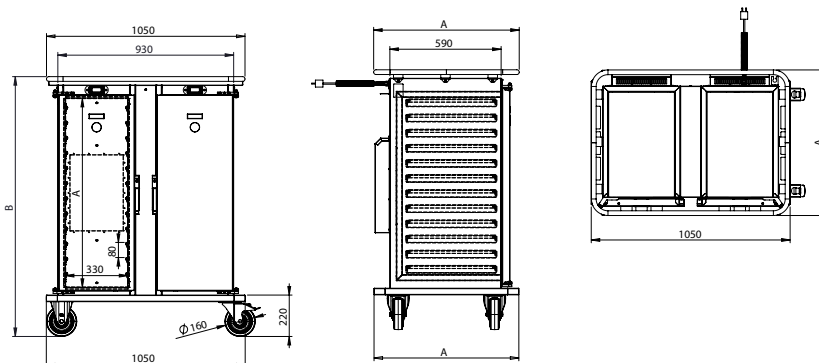

Constant Temperature Retention



Hygienic



Stainless



Climate Smart

Hallins Sales AB
Fabriksvägen 1
SE-599 33 Ödeshög

Tel +46 144-153 00
E-mail support@hallins.com

HALLINS
hallins.com